


New Generation
924NG



AMCO  **VEBA**
LIFTING BEYOND HORIZONS

Technical data 924NG


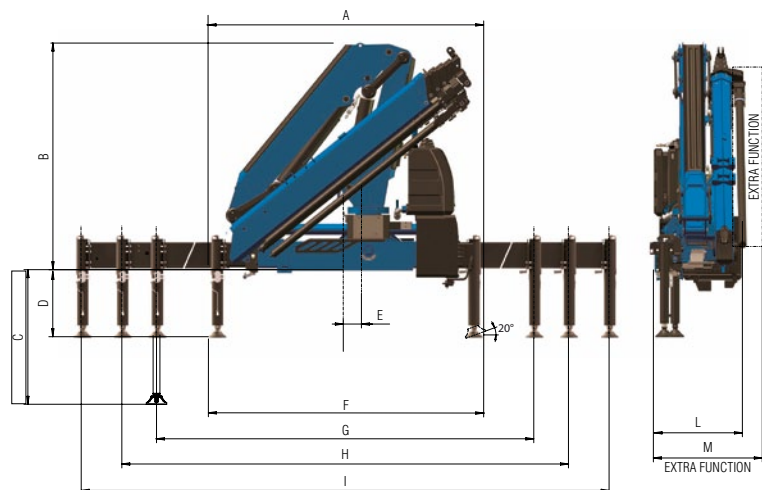


	E2	E3	E4	E5	E6	E7	E8	E4J3	E5J3	E6J2
A	2500	2500	2500	2500	2500	2500	2500	2520	2500	2500
B	2300	2300	2300	2300	2300	2300	2330	2715	2615	2605
C	1348	1348	1348	1348	1348	1348	1348	1348	1348	1348
D	611/666	611/666	611/666	611/666	611/666	611/666	611/666	611/666	611/666	611/666
E	150	150	150	150	150	150	150	150	150	150
F	2520	2520	2520	2520	2520	2520	2520	2520	2520	2520
G	4860	4860	4860	4860	4860	4860	4860	4860	4860	4860
H	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500
I	7420	7420	7420	7420	7420	7420	7420	7420	7420	7420
L	935	935	935	935	935	1005	1005	1055	1055	1055
M	1055	1055	1055	1055	1055	1080	1080	-	-	-

Standard

- **Designed in accordance with EN12999:2020 + EN13849**
- **Design class: HC1-HD4**
- Cross controls
- Flanged valves
- Oil tank
- Manually extendable stabilizers
- Fixed stabilizer cylinders
- Swivel stabilizer foot
- Centralized greasing system
- Double linkage
- SGS Sprint Generation System
- SDD Soft Descent Drive
- A Class - Crane Control System (CE)
- LED panel - Human Machine Interface

Lifting Moment	Slewing Angle	Working pressure	Oil tank capacity	Oil flow	Max Vertical Reach (Hydr)	Crane weight without stabilizers
tm	°	bar	l	l/min	m	kg
2S 22,5	415	315	130	80	11,7	2315
3S -	415	310	130	80	13,8	2455
4S -	415	310	130	80	15,9	2595
5S -	415	310	130	80	18,1	2720
6S -	415	310	130	80	20,3	2825
7S -	415	310	130	80	22,5	2945
8S -	415	310	130	80	24,8	3035
4SJ3 -	415	325	130	80	24,1	3255
5SJ3 -	415	330	130	80	25,6	3210
6SJ2 -	415	325	130	80	25,9	3100

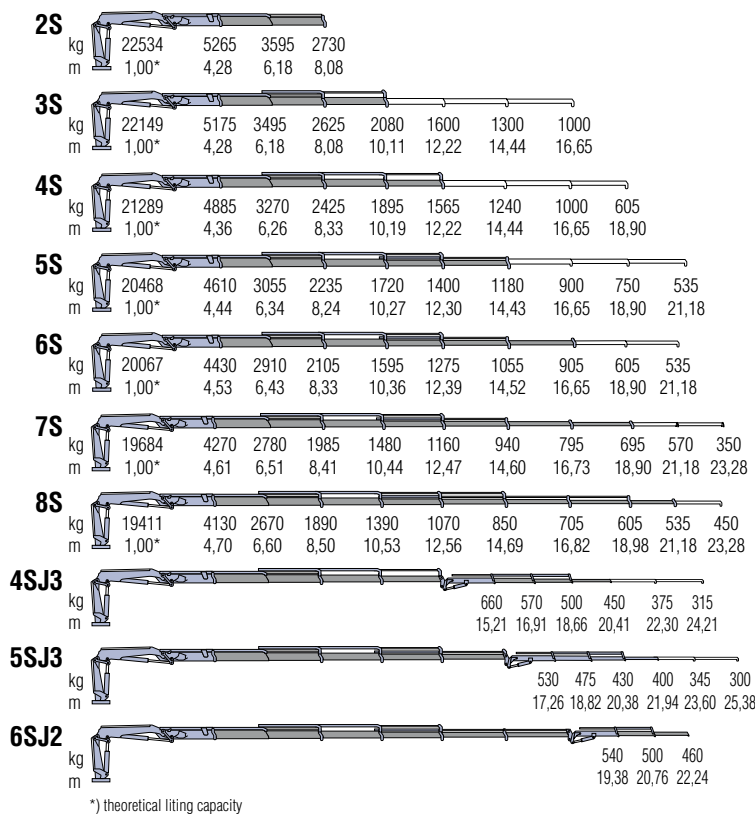

Recommended truck:
M.T.T. ton 19 - G.V.W. ton 19

AMCO / VEBA
LIFTING BEYOND HORIZONS

H.C.E. SpA
Via Einstein, 4
42028 Poviglio (RE) Italy
Tel. +39 0522 40.80.11
Fax +39 0522 40.80.80
info@amcoveba.it
commerciale@amcoveba.it
www.amcoveba.com



Dealer