


VR85



AMCO  **VEBA**
LIFTING BEYOND HORIZONS

Technical data

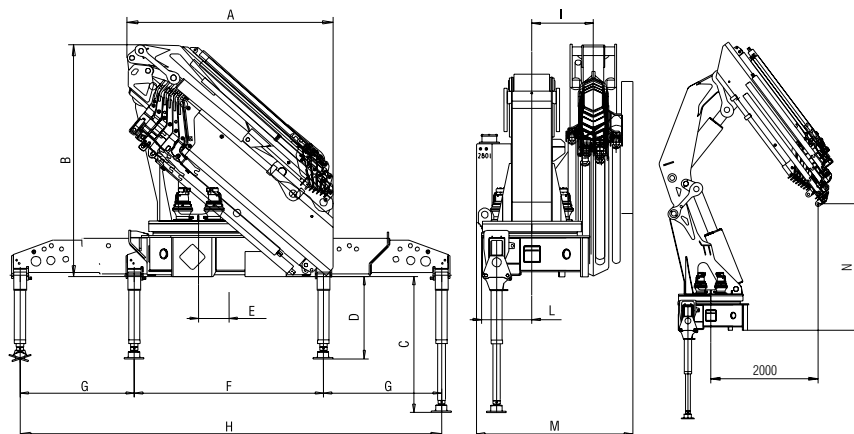

	2S	4S	6S	8S	10S	6SJ6	8SJ4
A	2530	2530	2530	2530	2530	2530	2545
B	2450	2450	2450	2505	2635	2800	2875
C	1650	1650	1650	1650	1650	1650	1650
D	997	997	997	997	997	997	997
E	370	370	370	370	370	370	370
F	2290	2290	2290	2290	2290	2290	2290
G	3240	3240	3240	3240	3240	3240	3240
H	8770	8770	8770	8770	8770	8770	8770
I	745	745	745	745	745	745	745
L	610.5	610.5	610.5	610.5	610.5	610.5	610.5
M	1610	1610	1770	1795	1795	1900	1900
N	2650	2650	2580	2530	2355	-	-

2S		24250	17100	12400	9550
kg		3.00*	4.25	5.95	7.75
m					

4S		23500	16250	11620	8820	7010	5820
kg		3.00*	4.32	6.05	7.85	9.75	11.65
m							

6S		22600	15150	10800	8150	6350	5200	4380	3800	2890	2580	1935
kg		3.00*	4.47	6.20	7.97	9.90	11.80	13.80	15.80	17.80	19.80	22.20
m												


8S		22000	14750	10350	7650	5900	4770	3920	3320	2890	2580	1935	1750	1350
kg		3.00*	4.47	6.20	7.97	9.90	11.80	13.80	15.80	17.80	19.80	22.20	24.35	26.70
m														

10S		21800	13750	9650	7100	5400	4300	3500	2920	2490	2185	1935	1750	1350
kg		3.00*	4.75	6.45	8.25	10.20	12.05	14.05	16.05	18.05	20.05	22.20	24.35	26.70
m														

6S		1700	1500	1360	1235	1130	1040	920	630
J6		19.00	20.60	22.25	23.90	25.60	27.40	29.20	31.20
kg									
m									

8S		950	850	775	710	660	550
J4		22.50	24.20	25.95	27.70	29.50	31.40
kg							
m							

*) theoretical lifting capacity



Recommended truck:
M.T.T. ton 42 - G.V.W. ton 42

AMCO VEB
LIFTING BEYOND HORIZONS

H.C.E. SpA
Via Einstein, 4
42028 Poggio (RE) Italy
Tel. +39 0522 40.80.11
Fax +39 0522 40.80.80
info@amcoveba.it
commerciale@amcoveba.it
www.amcoveba.com



Standard

- Designed in accordance with EN12999:2020 + EN13849
- Fatigue test classification: 3B
- Multifunction radio remote control
- Load limiting device
- Hexagonal section extension
- Independent extension cylinders
- Turning stabilizers
- Radio-controlled hydraulic extension stabilizers
- Flanged valves
- Oil tank
- Assembly kit
- EBB Electronic Black Box
- SGS Sprint Generation System
- AVPS Amco Veba Power System
- SDD Soft Descend Drive
- P Class - Crane Control System (CE)
- TOP monitor 7" - Human Machine Interface

	Lifting Moment	Slewing Angle	Working pressure	Oil tank capacity	Oil flow	Max Vertical Reach (Hydr)	Crane weight without stabilizers
	tm	°	bar	l	l/min	m	kg
2S	74,0	Endless	315	280	100	12,1	7450
4S	-	Endless	315	280	100	16,0	8100
6S	-	Endless	315	280	100	20,2	8700
8S	-	Endless	315	280	100	24,1	9250
10S	-	Endless	315	280	100	28,7	9650
6SJ6	-	Endless	315	280	100	33,6	10200
8SJ4	-	Endless	315	280	100	34,0	10100

Dealer